

# EXIDE<sup>®</sup> BIKE

MOTORCYCLE & SPORT BATTERIES



2010

# EXIDE<sup>®</sup> BIKE


★★★ FACTORY SEALED



★★ MAINTENANCE FREE



★ CONVENTIONAL New!

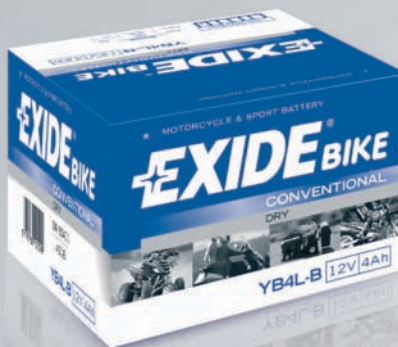

\* 'Seal' or 'sealed', refers to leak-proof/spill-proof capability under normal operating. The release of minimal gas during recharge may occur, which is normal.

New! New 6-pack acid bottle included

# MAIN ADVANTAGES

		FACTORY SEALED ★ ★ ★	MAINTENANCE FREE ★ ★	CONVENTIONAL ★ <small>New!</small>
Ready for installation and use		✓		
Factory seal guaranteed by manufacturer		✓	(1)	
Side mounting approved		✓	✓	
Acid bottle included for initial filling		(2)	✓	✓
<b>Technology</b>		AGM-GEL charged	AGM DRY	DRY
<b>Electrical Performances</b>		High Power Deep Discharge	High Power	Standard Power

(1) Becoming sealed after filling / (2) Not required as acid is already into the cells

# RECOMMENDED APPLICATIONS

	FACTORY SEALED ★ ★ ★	MAINTENANCE FREE ★ ★	CONVENTIONAL ★ <small>New!</small>
<b>Motorcycles + Scooter</b> <hr/> <b>All Terrain + Utility Vehicles</b> <hr/> <b>Snow mobile</b> <hr/> <b>Personal Watercraft + Jetski</b> <hr/> <b>Tractor + Garden machines</b>	High class (3) + Off Road	Most Popular	Classic + Collection + Old park

(3) BMW compliant

New! New 6-pack acid bottle included



# MOTORCYCLE & SPORT

## FACTORY SEALED



- High power + Deep Discharge performances
- Multi-positional fitment
- Factory Seal guaranteed by manufacturer (VRLA Class)
- Unrestricted (cheaper) distribution
- Acid already into cells (time and effort saving)
- No acid handling at anytime (no environmental issues)
- Special label indicates recharge when normal stocking period is exceeded
- 14 types covering 40% of the Parc
- Assistance not required at all (no wait for installation)
- Extended life
- Suitable for cold weather or motion tilting
- Absolutely Maintenance Free
- Approved for Seasonal use
- Handling precautions not required (leak-proof, spill-proof)
- AGM-GEL construction (immobilised acid in cells)
- Wet charged (with acid in cells) Ready for use
- Calcium (Ca) alloy in plates
- AGM (Glass mat) separator

## MAINTENANCE FREE



- High power performances
- Multi-positional fitment
- Fully sealed after plug installation
- Simple rules for distribution displayed on the packing
- Including a 6-pack acid bottle for initial filling
- Acid handling simplified (right amount) by the pack
- Recharge during stocking period is not required
- 26 types covering 50% of the Parc
- Requires assistance to put in service
- Extended life
- Suitable for cold weather or motion tilting
- Absolutely Maintenance Free
- Approved for Seasonal use
- Handling precautions not required (leak-proof, spill-proof)
- AGM construction (immobilised acid in cells)
- Dry charged (without acid in cells) 6-pack acid bottle included
- Calcium (Ca) alloy in plates
- AGM (Glass mat) separator

# BATTERIES

## CONVENTIONAL New!



- Standard performances
- Upright Installation only
- Not sealed  
(Regular gas emission)

- Simple rules for distribution displayed on the packing
- Including a 6-pack acid bottle for initial filling
- Acid handling simplified (right amount) by the pack
- Recharge during stocking period is not required
- 78 types covering 60% of the Parc

- Requires assistance to put in service
- Regular life duration
- For use in regular conditions
- Consumed water could require maintenance
- Seasonal use Could require maintenance
- Handling precautions required to avoid acid spillage

- Lead acid construction (wet flooded)
- Dry charged (without acid in cells) 6-pack acid bottle included
- Antimony (Sb) alloy in plates
- Glass fibre separators

### Features

### Distributor Benefits

### End-Users Benefits

### Characteristics

## 12V FACTORY SEALED Battery Specifications

performances		dimensions			features			
code	capacity 10h (Ah)	L(mm)	W(mm)	H(mm)	polarity	terminal type		
						front	side	top
SLA12-4	3	113	70	85				
SLA12-5	4	113	70	105				
SLA12-6	6	150	87	93				
SLA12-8	8.6	150	87	93				
SLA12-9	9	135	75	139				
SLA12-10	10	150	87	130				
SLA12-12	12	150	87	145				
SLA12-14	12	134	89	164				
GEL12-16	16(20h)	180	75	165				
SLA12-18	18	181	77	167				
GEL12-19	19(20h)	185	80	170				
SLA12-23	21	205	86	162				
GEL12-30	30	197	132	186				
SLA12-31	30	166	126	175				

## 12V MAINTENANCE FREE Battery Specifications

performances		dimensions			features			
code	capacity 10h (Ah)	L(mm)	W(mm)	H(mm)	polarity	terminal type		
						front	side	top
YT4B-B5	2.3	113	38	85				
YTR4A-B5	2.3	113	48	85				
YTX4L-B5	3	113	70	85				
YTX5L-B5	4	113	70	105				
YTX7A-B5	6	150	87	93				
YTX7L-B5	6	113	70	130				
YT7-B5	6	113	70	105				
YT7B-B5	6.5	150	65	93				
YT9B-B5	8	150	70	105				
YTX9-B5	8	150	87	105				
YTZ10-B5	8.6	150	87	93				
YTX9C-B5	9	135	75	139				
YT12A-B5	9.5	150	87	105				
YT12B-B5	10	150	70	130				
YTX12-B5	10	150	87	130				
YTZ12-B5	11	150	87	110				
YT14B-B5	12	150	70	145				
YTX14-B5	12	150	87	145				
YTX14AH-B5	12	134	89	164				
YTX14AHL-B5	12	134	89	164				
YTX15L-B5	13	175	87	130				
YTX16-B5	14	150	87	161				
YTX20-B5	18	175	87	155				
YTX20L-B5	18	175	87	155				
YTX20CH-B5	18	150	87	161				
YTX24HL-B5	21	205	87	162				

## 6V CONVENTIONAL Battery Specifications

performances		dimensions			features			
code	capacity 10h (Ah)	L(mm)	W(mm)	H(mm)	polarity	terminal type		
						front	side	top
6N2-2A	2	70	47	95				
6N4-2A	4	70	70	95				
6N4-2A-4	4	70	70	95				
6N4-2A-7	4	70	70	95				
6N4A-4D	4	60	56	130				
6N4B-2A	4	101	47	95				
6N6-1D-2	6	98	56	110				
6N6-3B-1	6	98	56	110				
B39-6	7	125	48	125				
B49-6	10	90	82	160				
6N11A-1B	11	121	59	131				
6N11A-3B	11	121	59	131				
6N12A-2C	12	155	56	115				
6N12A-2D	12	155	56	115				
B38-6A	13	119	83	162				

## 12V CONVENTIONAL Battery Specifications

performances		dimensions			features			
code	capacity 10h (Ah)	L(mm)	W(mm)	H(mm)	polarity	terminal type		
						front	side	top
YB2,5L-C	2.5	80	70	105				
YB3L-A	3	98	56	110				
YB3L-B	3	98	56	110				
YB4L-A	4	120	70	92				
YB4L-B	4	120	70	92				
12N5-3B	5	120	60	130				
12N5-4B	5	120	60	130				
YB5L-B	5	120	60	130				
12N5.5-3B	5.5	135	60	130				
12N5.5-4A	5.5	135	60	130				
12N5.5A-3B	5.5	103	90	114				
12N7-3B	7	135	75	133				
12N7-4B	7	135	75	133				
YB7C-A	8	130	90	114				
YB7-A	8	135	75	133				
YB7L-B	8	135	75	133				
12N9-3B	9	135	75	139				
12N9-4B-1	9	135	75	139				
YB9-B	9	135	75	139				
YB9L-A2	9	135	75	139				
YB9L-B	9	135	75	139				
12N10-3B	10	135	90	145				
YB10L-A2	11	135	90	145				
YB10L-B	11	135	90	145				
YB10L-B2	11	135	90	145				
12N12A-4A-1	12	134	80	160				
YB12A-A	12	134	80	160				
YB12A-B	12	134	80	160				
YB12AL-A	12	134	80	160				
YB12AL-A2	12	134	80	160				
YB12B-B2	12	160	90	130				
YB12C-A	12	134	80	175				
12N14-3A	14	134	89	166				
YB14-A2	14	134	89	166				
YB14-B2	14	134	89	166				
YB14L-A2	14	134	89	166				
YB14L-B2	14	134	89	166				
HYB16A-A	16	149	89	178				
YB16AL-A2	16	205	70	162				
YB16B-A	16	160	90	162				
YB16B-A1	16	160	90	162				
12N18-3	18	205	90	162				
YB18L-A	18	180	90	162				
YB16-B	19	175	100	155				
YB16CL-B	19	175	100	175				
YB16L-B	19	175	100	155				
12Y16A-3A	20	185	81	170				
12Y16A-3B	20	185	81	170				
Y50-N18L-A	20	205	90	162				
Y50-N18L-A2	20	205	90	162				
Y50-N18L-A3	20	205	90	162				
12N24-3A	24	184	124	175				
12N24-4A	24	184	124	175				
U1-9	24	196	130	180				
Y60-N24-A	28	184	124	169				
Y60-N24AL-B	28	184	124	169				
Y60-N24L-A	28	184	124	169				
YHD4-12	28	205	132	165				
Y60-N30-A	30	185	128	168				
Y60-N30L-A	30	185	128	168				
Y60-N30L-B	30	185	128	168				
YB30L-B	30	165	130	176				
UIR-11	30	196	130	180				

**New!** New 6-pack acid bottle included